

ESRF-ESF

In-line Gas Flow Sensors



ES Systems has developed ESRF-ESF, a MEMS gas flow sensor family, based on the hot-film anemometer principle for mass gas flow measurements.

ESRF-ESF gas flow sensors feature bidirectional gas flow sensing of up to ± 500 l/min with a total error band of 1% m.v. The streamlined symmetrical body design, manufactured from high quality polymer, presents very low pressure drop even at the maximum flow in both directions. Calibration gas is air but other non-aggressive gases are available upon request.

Operating down to 3.3V supply voltage, ESRF-ESF gas flow sensors provide calibrated and temperature compensated output on an SPI or I²C bus making them plug & play for direct interfacing to low voltage MCUs and systems. The user is provided with a multitude of options (e.g. power supply, uni/bi directionality or analog output) so that the right sensor configuration can be selected based on the specific requirements for each application.

Due to the compact design, and versatility, ESRF-ESF gas flow sensors are ideal for medical, process & pharmaceutical equipment where high accuracy and reliability are of the essence.



57, I. Metaxa str.
19441 Koropi - Athens, Greece

T +30 216 2000500

F +30 216 2000555

info@esenssys.com

www.esenssys.com



ESRF-ESF

In-line Gas Flow Sensors




Specifications

Calibration Gas	Air, other available on request
Flow Range	Up to ±500 l/min, Bi or Unidirectional
Supply Voltage	3.3V or 5V
Output	I ² C, SPI, 0-5V, 0-3.3V
Total Error	1% m.v.
ADC Resolution	16 bit
Output Update Rate	1 ms
Pressure Drop	<7.5 mbar @ 200 l/min
Operating Temperature	-40 °C ... +85 °C
Calibration Temperature	0 °C ... +50 °C
Humidity	0% - 95% RH, Non-Condensing
Size (W x L x H)	44 x 92.8 x 35.4 mm
Pneumatic Interface	22 mm ISO 5356
Electrical Interface	2mm Locking Connector

Evaluation Kit

The gas flow evaluation kit has been designed to provide the user with a compact solution for the evaluation of the ESRF-ESF bidirectional gas flow sensors with no need for custom software or hardware design and development. The kit has been designed to work as a plug and play device. A user-friendly software has been developed in order to log and monitor flow data of the ESRF-ESF sensors.

Ordering Information

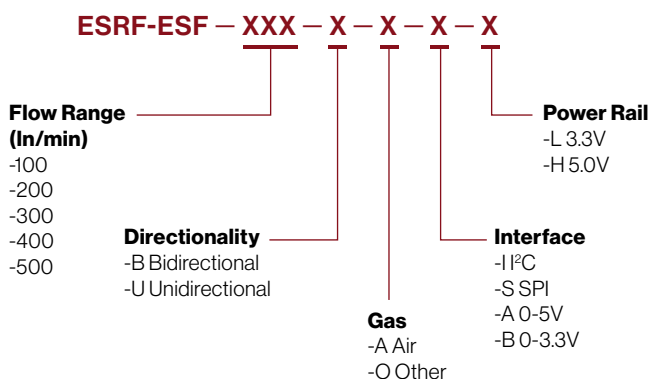

57, I. Metaxa str.
19441 Koropi - Athens, Greece
T +30 216 2000500
F +30 216 2000555
info@esenssys.com

www.esenssys.com